



NAVAJO COUNTY STANDARD FOR TYPICAL CULVERT INSTALLATION

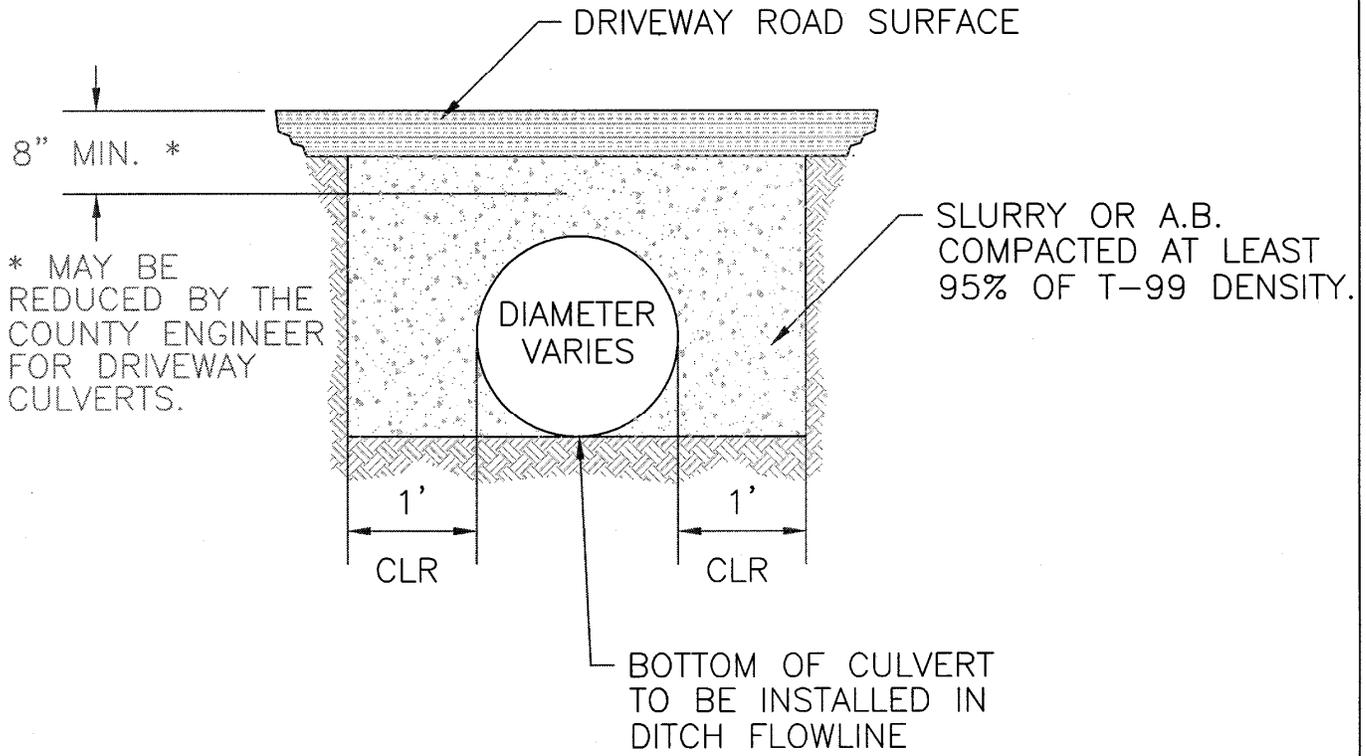

GENERAL NOTES:

1. RESIDENTIAL DRIVEWAY CULVERTS SHALL HAVE NOT LESS THAN 8" OF TOTAL COVER, OR SHALL BE PROTECTED WITH A 4" THICK REINFORCED CONCRETE SLAB.
2. COMMERCIAL DRIVEWAY CULVERTS SHALL HAVE NOT LESS THAN 12" OF TOTAL COVER, OR SHALL BE PROTECTED WITH A 6" THICK REINFORCED CONCRETE SLAB.
3. CULVERT SIZE AND MATERIALS SHALL BE AS APPROVED BY THE COUNTY ENGINEER. INSTALLATION MAY VARY IN CONFORMANCE WITH MANUFACTURER'S RECOMMENDATIONS.

REFER TO THE RIGHT-OF-WAY PERMIT SPECIFICATIONS MANUAL FOR THE DEFINITION OF TERMS SUCH AS A.B., A.C., T-99, SLURRY, ETC.



NAVAJO COUNTY, ARIZONA
DEPT. OF PUBLIC WORKS

ENGINEERING
DIVISION

STANDARD: NC-C-13.02

APPROVED BY:

DATE:

DES. ATB

DATE 7/00

DR. JR

DATE 7/00

CKD. RGY

DATE 7/00

SCALE 1" = N/A

NOT TO SCALE

Richard G. Young